FRAME

Frame HTML dapat digunakan untuk membuat tampilan halaman HTML yang terbagi-bagi menjadi beberapa bagian dimana setiap bagiannya merupakan satu halaman HTML yang terpisah. Ini dilakukan untuk membuat tampilan halaman HTML yang salah satu atau beberapa bagian berganti-ganti isinya sedang bagian lain tetap sehingga dapat menghemat bandwith internet.


Latihan FRAME

```
<html>
<head>
<title>frame</title>
</head>
        <frameset rows=20%,*,10%>
                <frame  src="header.html">

                <frameset cols=20%,*,20%>
                        <frame src="kiri.html">
                        <frame  src="tengah.html">
                        <frame  src="kanan.html">
                </frameset>

                <frame  src="footer.html">
        </frameset>

<body>
</body>
</html>
```

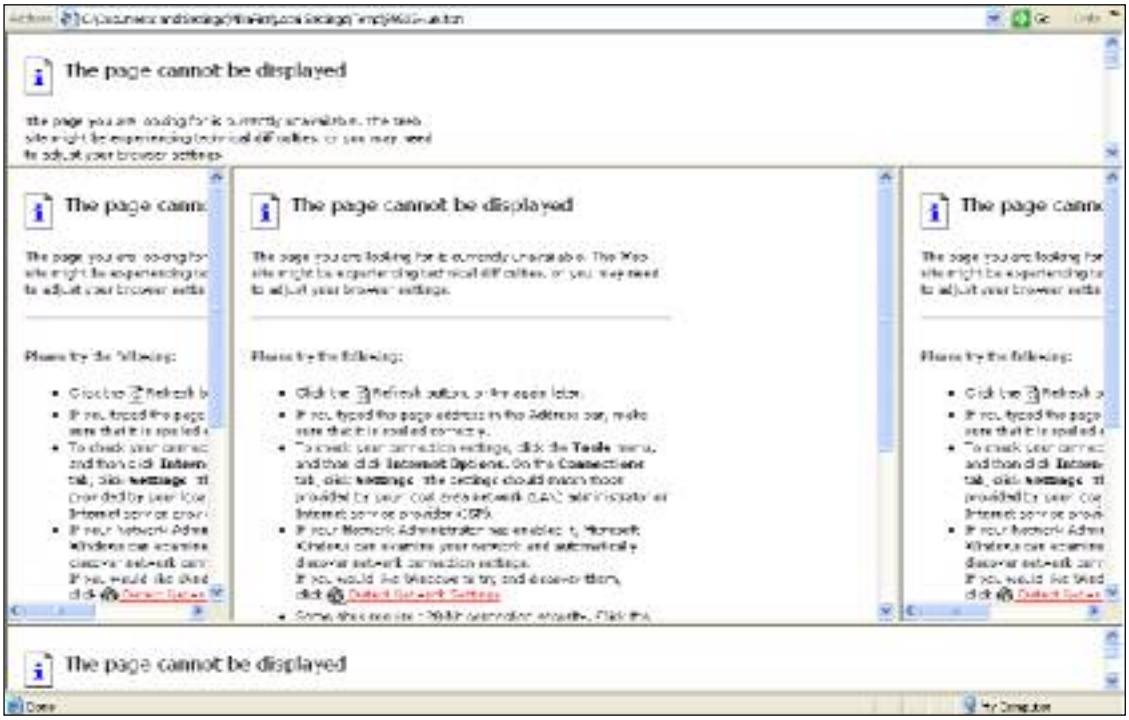

Buatlah file-file berikut ;

JudulFrame.html

```
<HTML>
  <Head>
  </head>
  <body bgcolor=black>
    <Center>
        <b><font color=yellow face=arial black     size=7> FRAME SET  </font></b>

  </body>
</HTML>
```

FormFrame.html

```
<HTML>
  <Head>
  </head>
  <body>
<FORM>
<PRE>
N a m a :
<INPUT TYPE=Text NAME='Nama' size=20 Maxlength=20> <br>

Password          :
<INPUT TYPE=Password Name="alamat" Size=20 Maxlength=20> <br>
```

```
E-Mail    :
<INPUT TYPE=Text Name="email" Size=20> <br>

Phone    :
<INPUT TYPE=Text Name="phone" Size=7 ><br>

Sex      :
<INPUT TYPE=Radio Name='Sex"  VALUE='Male' CHECKED> Male<br>
<INPUT TYPE=Radio Name='Sex"  VALUE='Female' > Female<br>
  </body>
</HTML>
```

naskahFrame.html

```
<HTML>
  <Head>
  </head>
  <Body bgcolor=#008080>
```

Copy file instead of using rename when creating backup file This setting affects how UltraEdit generates the backup file. By default UltraEdit renames the original file to the backup file. The reason for the setting is that on some systems, if UltraEdit renames the original file to create the backup, the original file when it is recreated does not maintain the file permissions that previously existed. Setting this causes the rename not to occur, preserving the permissions.
Always create new file when copying to/from temporary file When copying to/from the temporary file to the users file UltraEdit does not create a new file, truncating the old file, it copies the file and sets the file length. On a few servers they appear not to like or support this and do not honor the setting of the file length correctly, causing remnants of the old file to remain if the users deletes a section of a file and saves it. Setting this causes the file to be truncated to 0 length prior to writing the file.
Use registry for settings (not INI file) - This will NOT move the existing items to the registry This setting causes the editor to save and retrieve all settings from the Registry. After UltraEdit determines the INI file in use it checks for this value before reading any other values. If this is set UltraEdit stores all settings in the Registry.
Skip FTP Close command when connecting to FTP Server When UltraEdit connects to an FTP server it issues a close command first to clear any previous connection that may have been aborted. In some cases with products that use FTP Tunneling this has caused a crash within the tunneling software. Setting this options causes UltraEdit not to issue this FTP close command.
Use DDE Associations When File Associations are set from within UltraEdit the setting to use DDE is normally set in the registry for the specific file type. On some systems this may cause an error message when the file is double clicked from Explorer. In this case ensuring that Use DDE Associations is not selected may resolve this. The file associations will need to be modified for this to take effect.

```
</body>
</HTML>
```

listFrame.html

```
<HTML>
  <Head>
  </head>
  <Body bgcolor=#008080>
<OL>
   <LI> <B>Makanan</B>
      <OL Style="text-indent:1">
         <LI> Timbel Komplit
         <LI> Timbel Tidak Komplit
         <LI> Sayur Asem
         <LI> Kurang Asem
      </OL>
   <LI> <B>Minuman</B>
      <OL>
         <LI> Es Campur Rujak
         <LI> Es Teller
         <LI> Sirup Jagung
      </OL>
</OL>
</body>
</HTML>
```

footerFrame.html

```
<HTML>
<H5> <marquee>><font color=yellow face=arial black ><i> FRAME SET
</font></H5>
</HTML>
```

index.html (file frame)

```
<html>
<Head>
<title> Frame set</title>
</head>

<FRAMESET Rows="15%,*,7%">

        <frame src="F:\X-CERC\HTML\Frame\judulframe.html">

        <FRAMESET Cols="17%,*,20%">
                <frame src="formframe.html">
                <frame src="naskahframe.html">
                <frame src="listframe.html" >
        </FRAMESET>

        <frame src="footerframe.html">

</FRAMESET>

</html>
```

